

Important Information & Instructions :

1. GX300 is Infineon Chipset model.
1. Software to be upgraded using GSMULTI V3.0
1. Software to be upgraded in USB mode by using the user data cable (Micro USB) SGDY0014302


Part Code ☐ **SGDY0014302**



USB Upgrade Procedure :

Step 1: Install GSMULTI V3.0

Step 2: Open GSMULTI folder in C:\\ drive

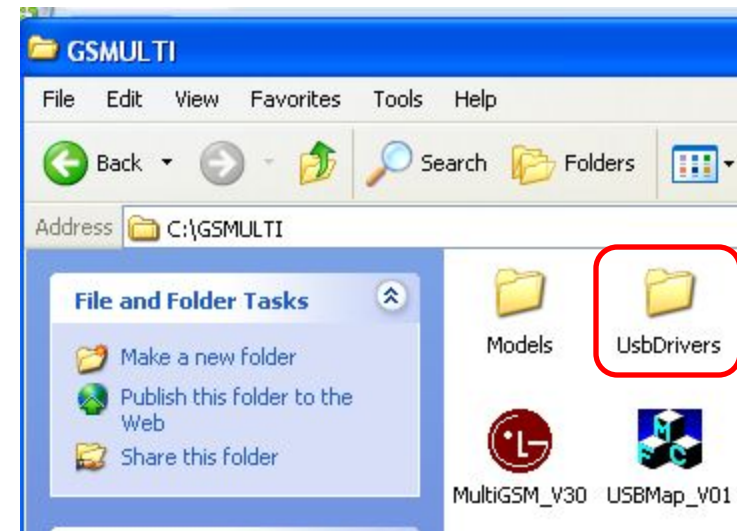

Step 3: Open the USB drivers folder & install drivers for Infineon Chipset as shown in next slide.

Open folder

Click on Setup File to install

Press Install to complete driver installation



Note : For GX300 a new USB mapping file has to be installed as shown below.
This will create “USBMap_V07” in GSMULTI folder in C:\\ drive.



USB PortMapping Setup_1.7



USBMap_V07
USBMap Application

Step 4: Connect phone with USB data cable in
OFF condition without battery


☐ It will search for drivers




Step 5: Press Next to continue driver installation




Step 6: Now disconnect phone & open “USB map”
in GSMULTI folder to create USB port for
USB Flashing.

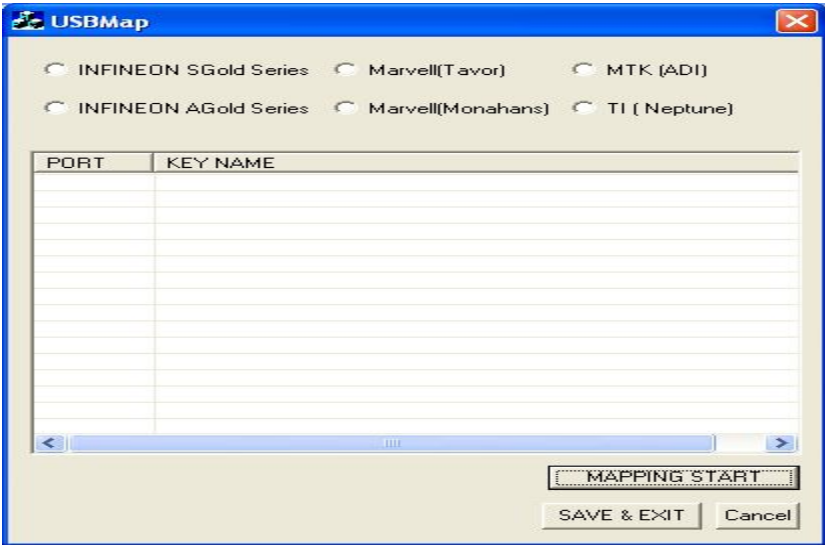

Step 7: For GX300 (Infineon Chipset) click on Infineon AGold ☐ Press “Mapping Start” & **Connect phone in OFF condition without Battery**

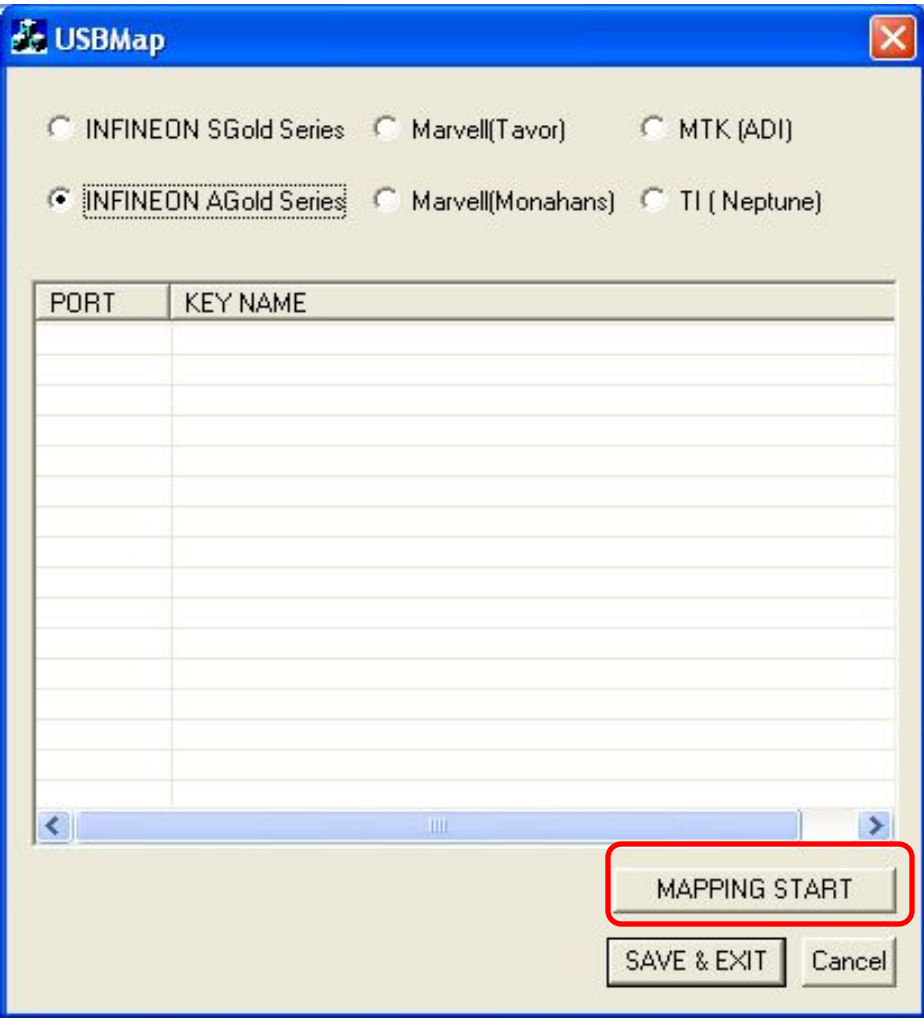


Step 8 : Once USB mapping is done , click “Save & Exit” & disconnect phone.

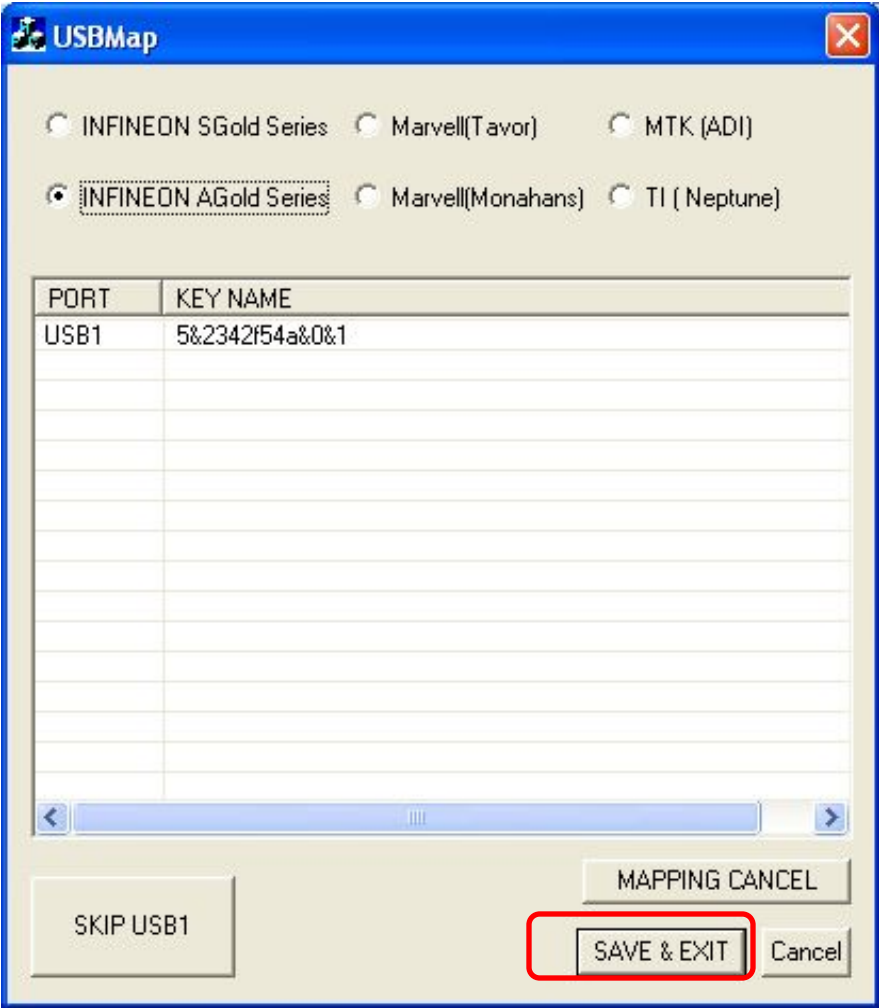

GX300 Software upgrade Guide



Step 9: Open GSMULTI V3.0, Select dll & Software file, & make configuration settings as shown.

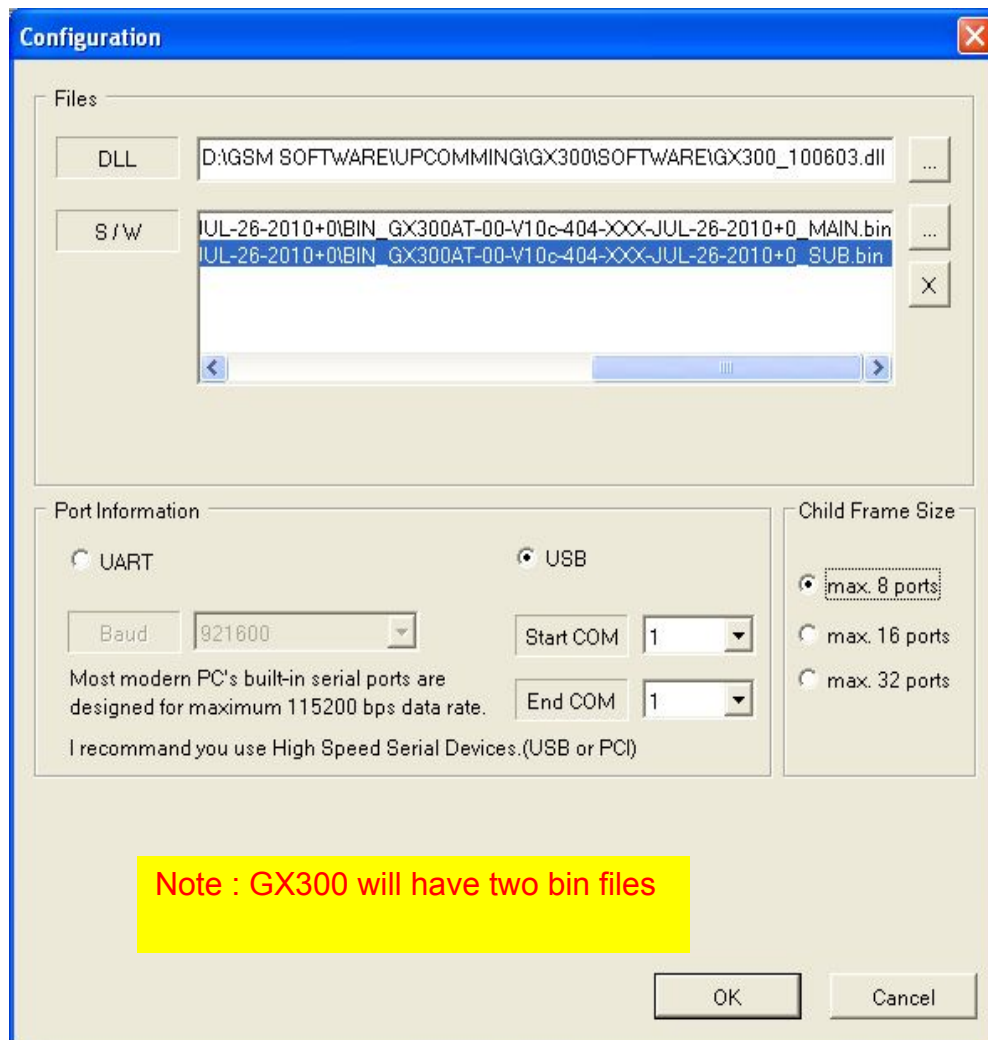

Step 10 : Connect phone in OFF condition when wait phone connecting is displayed.

