

## Important Information & Instructions :

1. GX300 is Infineon Chipset model.
1. Software to be upgraded using GSMULTI V3.0
1. Software to be upgraded in USB mode by using the user data cable (Micro USB) SGDY0014302


Part Code  **SGDY0014302**



## USB Upgrade Procedure :

**Step 1:** Install GSMULTI V3.0

**Step 2:** Open GSMULTI folder in C:\\ drive

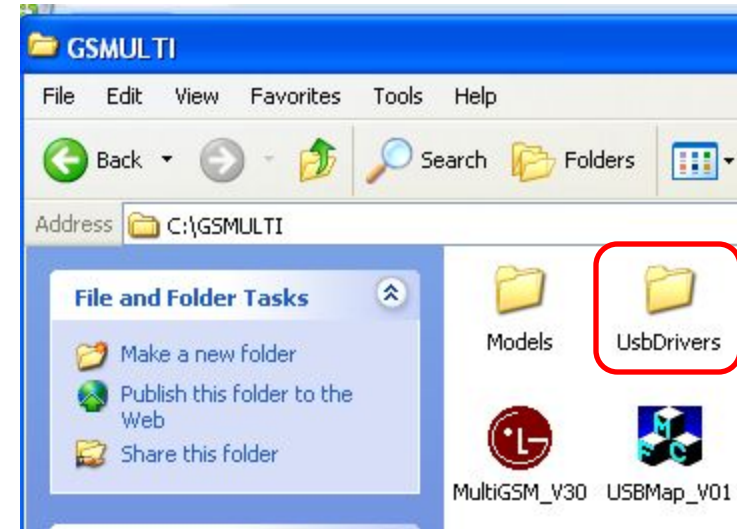


**Step 3:** Open the USB drivers folder & install drivers for Infineon Chipset as shown in next slide.

Open folder

Click on Setup File to install

Press Install to complete driver installation

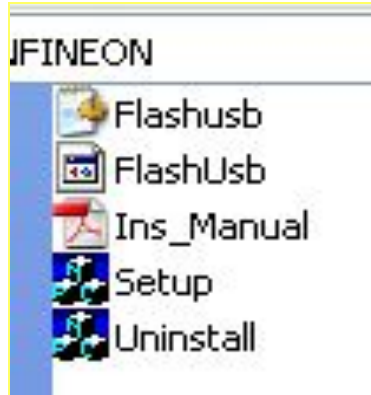

Note : For GX300 a new USB mapping file has to be installed as shown below.  
This will create "USBMap\_V07" in GSMULTI folder in C:\\ drive.



USB PortMapping Setup\_1.7



USBMap\_V07  
USBMap Application

**Step 4:** Connect phone with USB data cable in **OFF condition without battery**


- ☐ It will search for drivers



**Step 5:** Press Next to continue driver installation





**Step 6:** Now disconnect phone & open “USB map” in GSMULTI folder to create USB port for USB Flashing.

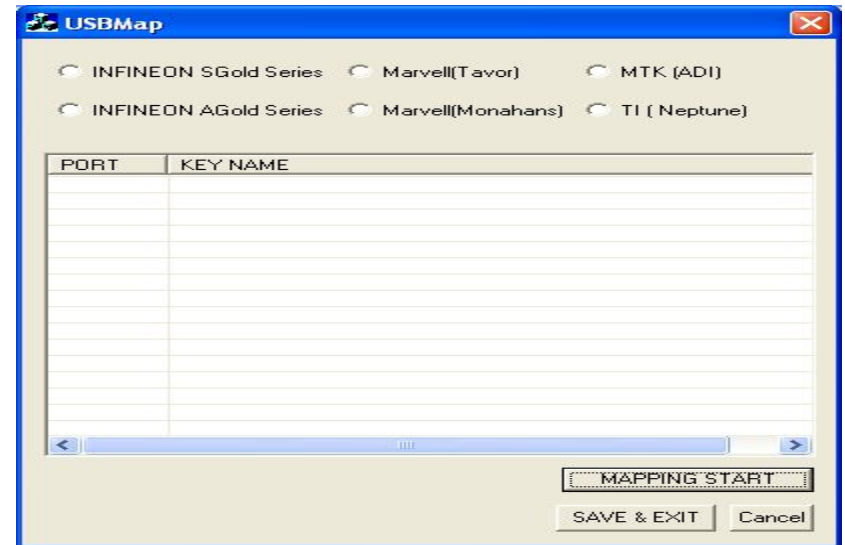


**Step 7:** For GX300 (Infineon Chipset) click on Infineon AGold  Press “Mapping Start” & **Connect phone in OFF condition without Battery**


**Step 8 :** Once USB mapping is done , click “Save & Exit” & disconnect phone.

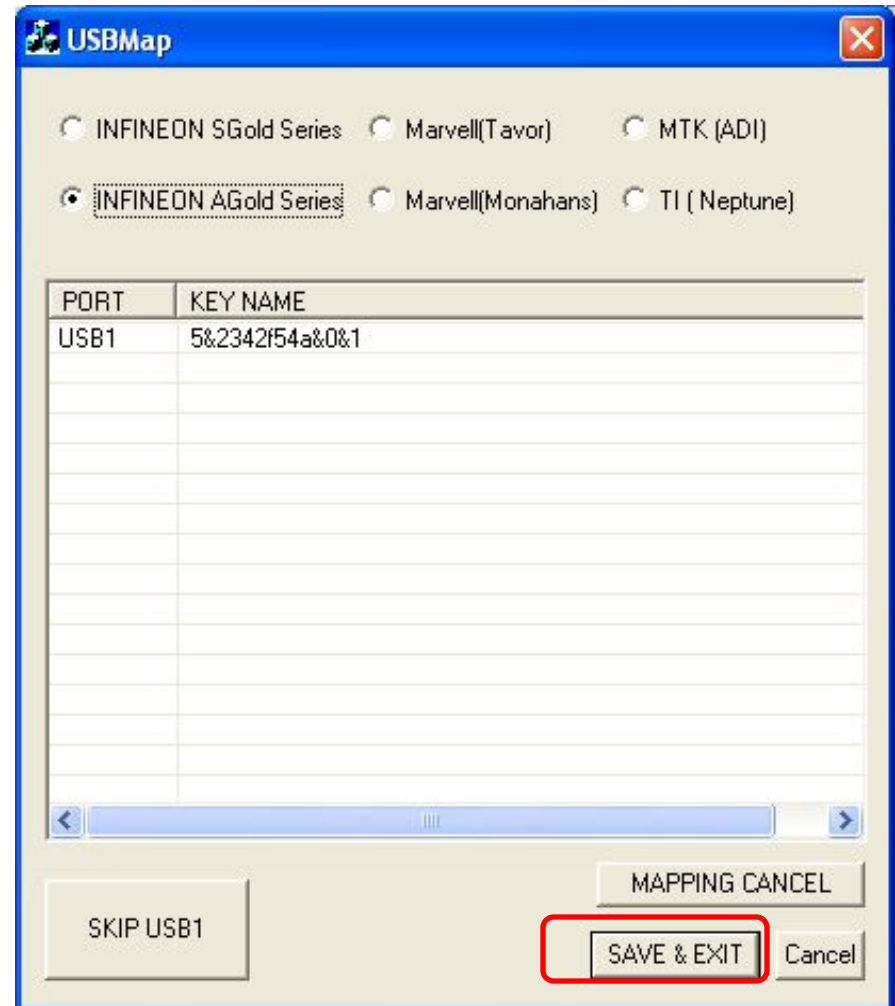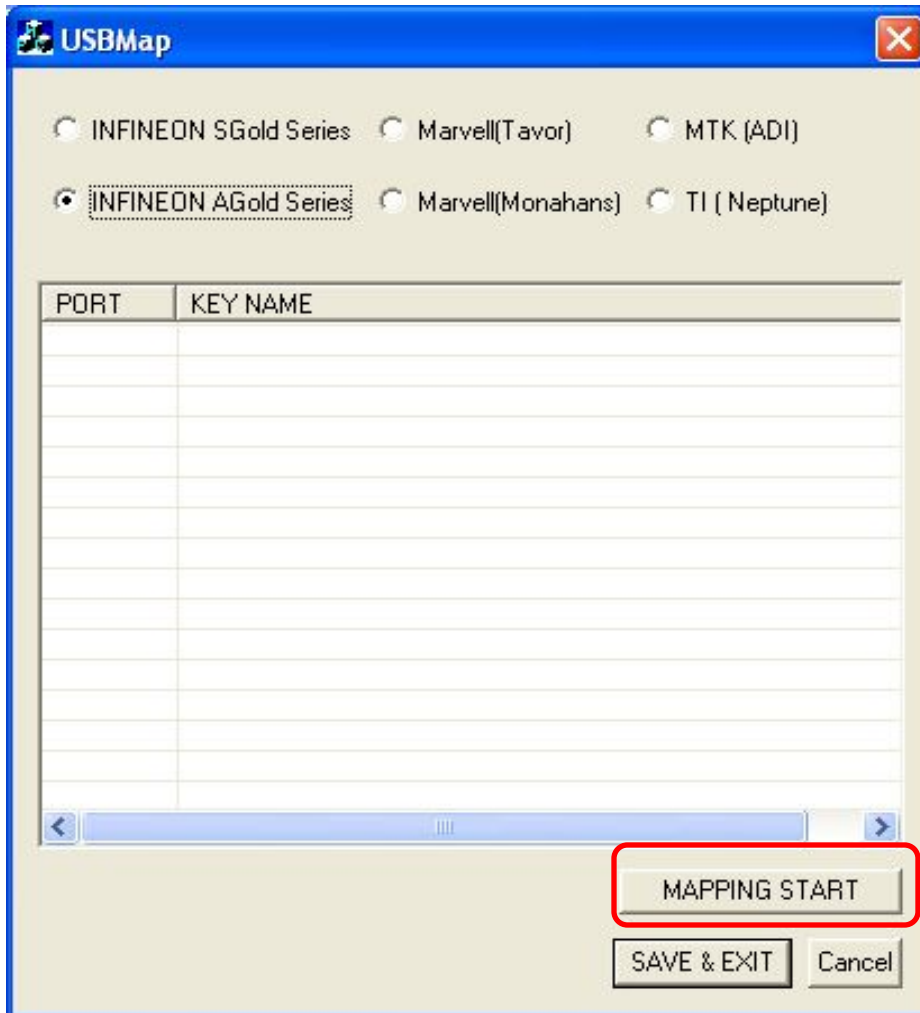

**Step 9:** Open GSMULTI V3.0, Select dll & Software file, & make configuration settings as shown.

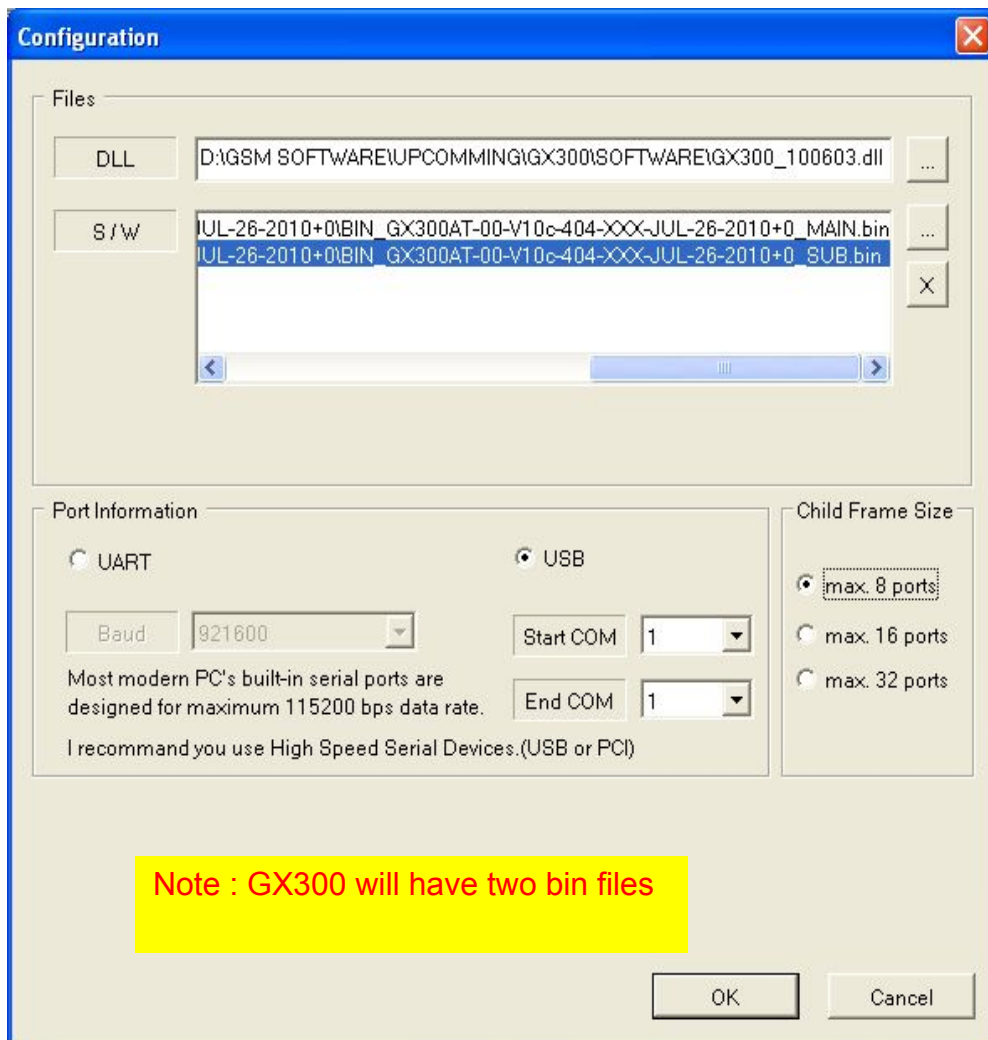

**Step 10 :** Connect phone in OFF condition when wait phone connecting is displayed.

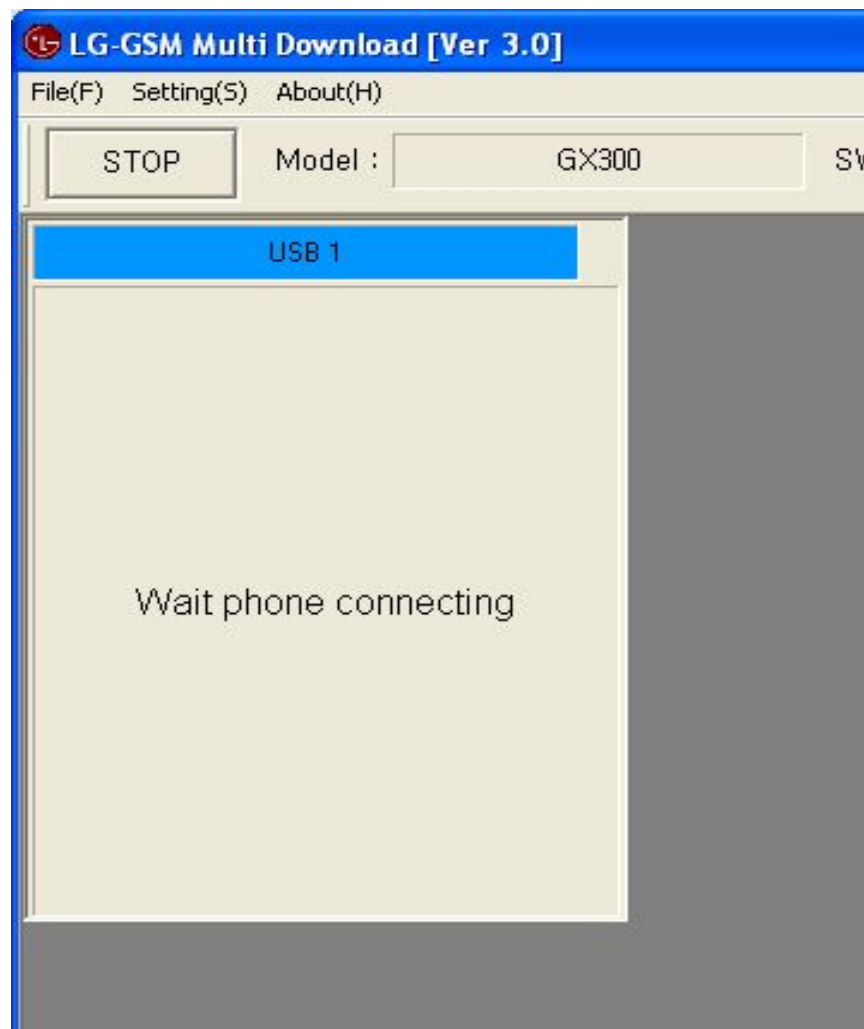

STOP

Model :

GX300

SW Version :

BIN\_GX300AT-00-V10c-404-XXX-JUL-26-2010+0\_MAIN,b

0/0



USB 1

L

PASS(845 sec)