


Fly IQ455 Flash SW Instruction



Step 1 Selection "MTK AllInOne_DA.bin" file

Tool Version: SP_Flash_Tool_exe_Windows_v5.1352.01

Tool Link: <http://pan.baidu.com/s/1jGyWurG>

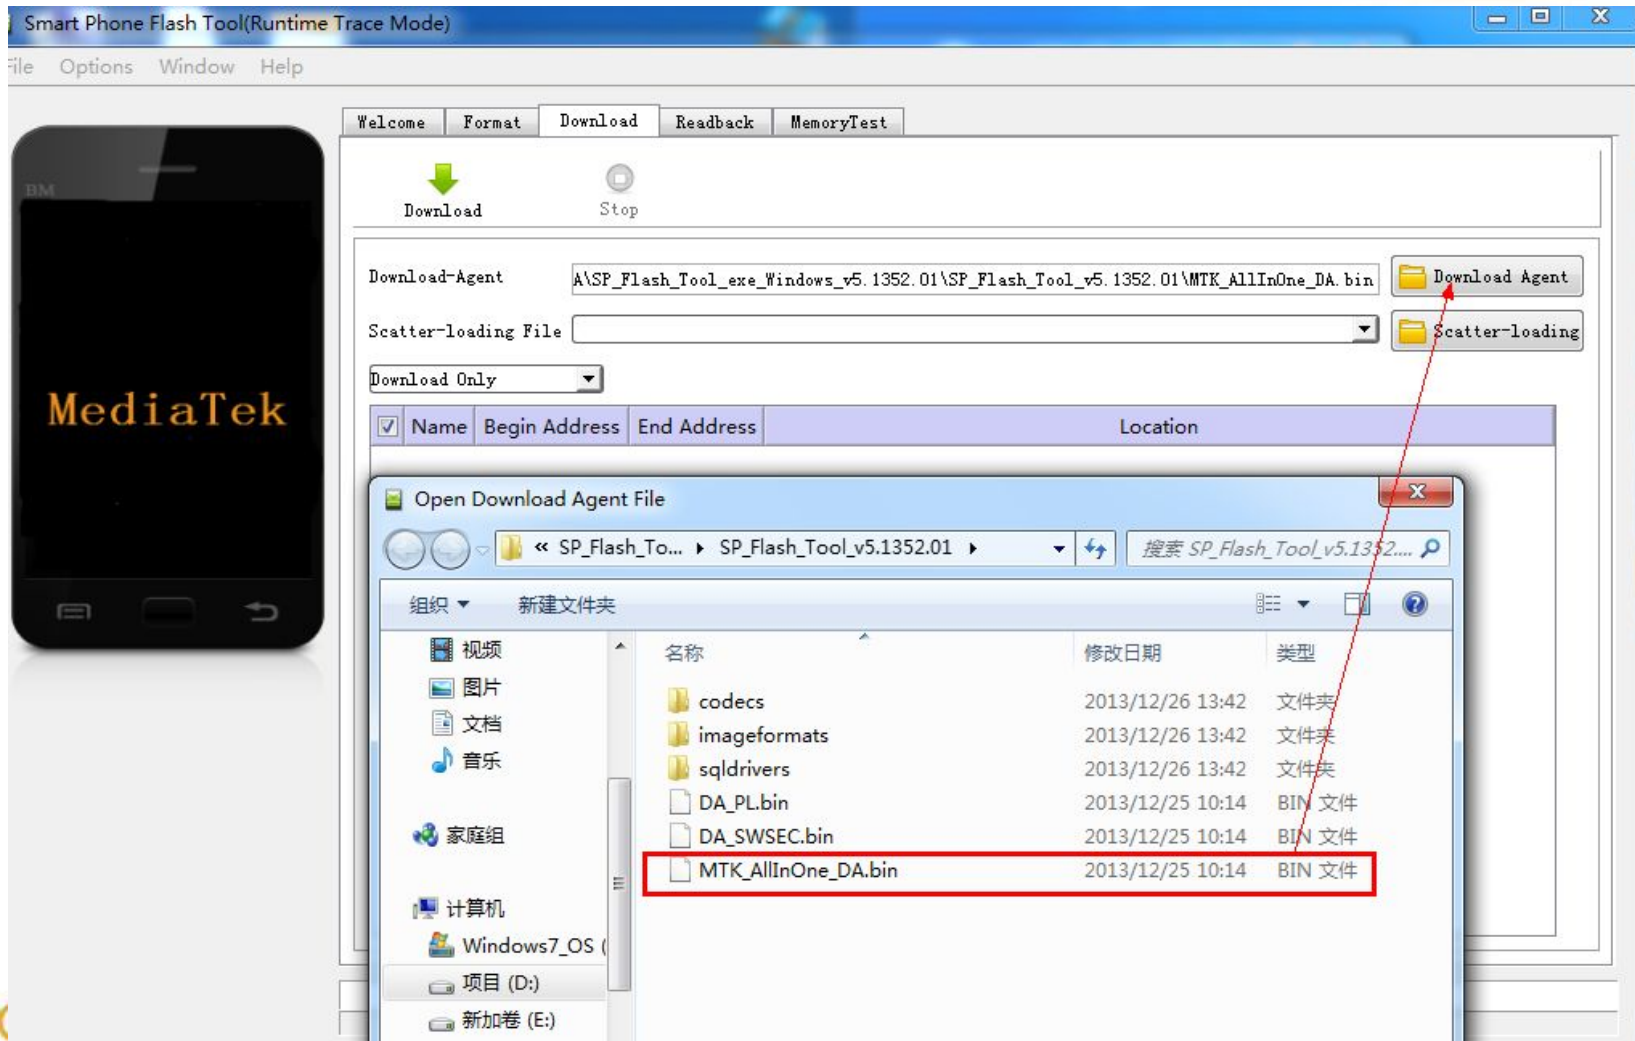

Step 2 Selection scatter file in SW



The screenshot displays the Smart Phone Flash Tool (Runtime Trace Mode) interface. On the left, a virtual smartphone is shown with the MediaTek logo. The main window has a menu bar (File, Options, Window, Help) and a toolbar with 'Download' and 'Stop' buttons. Below the toolbar, there are input fields for 'Download-Agent' (A\SP_Flash_Tool_exe_Windows_v5.1352.01\SP_Flash_Tool_v5.1352.01\MTK_AllInOne_DA.bin) and 'Scatter-loading File'. To the right of these fields are 'Download Agent' and 'Scatter-loading' buttons. An 'Open Scatter File' dialog box is open, showing a file explorer view of the directory 'SW01_FLY_IQ455_Octa_2014_02_22'. The file 'MT6592_Android_scatter' is selected and highlighted with a red box. A red arrow points from the 'Scatter-loading' button in the main window to the selected file in the dialog box. The file explorer shows a table of files with columns for '名称' (Name), '修改日期' (Modified Date), and '类型' (Type). The selected file 'MT6592_Android_scatter' has a modified date of '2014/2/22 11:34' and is a '文本文档' (Text Document). The file name 'MT6592_Android_scatter' is also visible in the '文件名(N):' field at the bottom of the dialog box.


名称	修改日期	类型
MT6592_Android_scatter	2014/2/22 11:34	文本文档


Step 3 Firmware Upgrade

Trace Mode)

Welcome | Format | **Download** | Readback | MemoryTest

 Download  Stop

Download-Agent A:\SP_Flash_Tool_exe_Windows_v5.1352.01\SP_Flash_Tool_v5.1352.01\MTK_AllInOne_DA.bin  Download Agent

Scatter-loading File C:\Users\Gary Hong\Desktop\SW01_FLY_IQ455_Octa_2014_02_22\SW01_FLY_IQ455_Octa_201...  Scatter-loading

Firmware Upgrade

<input checked="" type="checkbox"/>	Name	Begin Address	End Address	Region	Location
<input checked="" type="checkbox"/>	PRELOADER	0x0000000000000000	0x000000000001e20f	EMMC_BOOT_1	C:\Users\Gary Hong\Desktop\SW01_FLY_IQ...

1. Choose “Firmware Upgrade” type
2. Connect PC with USB cable
3. Insert Battery without press any key
4. Thanks!

Merci

谢谢

Thank You!

Danke

Grazie



Your Global Telecom Partner!